

5.5 GPM PUMP SPECS





- Polypropylene pump housing and valve plate
- Viton® Valves - Santoprene® Diaphragm
- Zinc Plated Steel fasteners
- Painted Steel 3" Motor Shell
- **Honeywell** MICRO SWITCH™
- Inline Fuse Protection
- 1/2" FNPT & QA Port Option
- 60 PSI (4.1 Bar) Max
- 5.5 GPM (20.8 LPM) Max
- Approved for use with **Roundup®** Agricultural Brand Herbicides
- Self Priming to 8 Feet
- Max Fluid Temp 140 Deg F
- 12V DC
- 17.0 Max Amps
- CE Approved
- 5.6 lbs Dry

Inline Fuse!




QA PORTS AVAILABLE!

MODEL	DESCRIPTION	PORTS	PACKAGING	UPC
EF5500	5.5 GPM 12 Volt Diaphragm Pump - Bulk	1/2" FNPT	Bulk	N/A
EF5500-BC	5.5 GPM 12 Volt Diaphragm Pump - Barcoded	1/2" FNPT	Bulk/BC	81448501346-8
EF5500-QA	5.5 GPM 12 Volt Diaphragm Pump - Quick Attach	QA Port	Bulk	N/A
EF5500-BOX	5.5 GPM 12 Volt Diaphragm Pump - Boxed	1/2" FNPT	Boxed	81448501043-6
EF5500-QA-BOX	5.5 GPM 12 Volt Diaphragm Pump - Box/Quick Attach	QA Port	Boxed	81448501381-9
EF5500-KIT	5.5 GPM Replacement Pump Head, Fully Assembled	1/2" FNPT	Boxed	81448501340-6

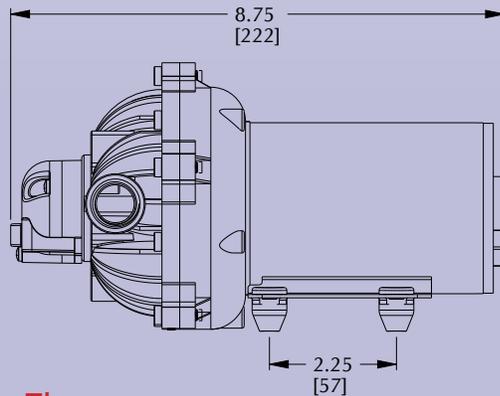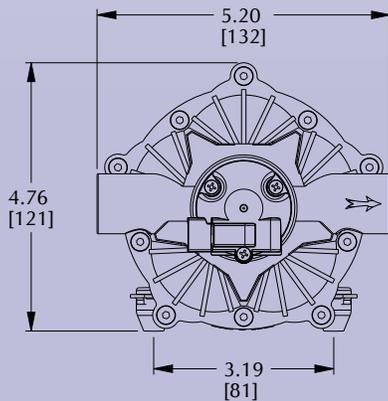

Pressure PSI/Bar	Current (Amps)	Flow GPM/LPM
0/0	8.6	5.8/21.96
10/.7	9.9	5.5/20.82
20/1.4	11.8	5.0/18.93
30/2.1	13.9	4.6/17.41
40/2.8	15.6	4.2/15.90
50/3.4	16.80	3.8/14.38
60/4.1	N/A	N/A

Flow
(GPM)
5.5
5.0
4.5
4.0
3.5
3.0

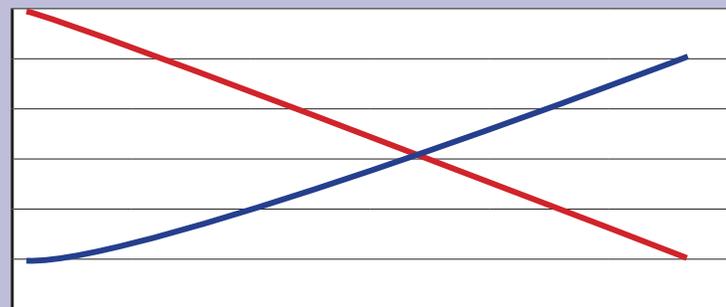

Current
(AMPS)
16.0
14.0
12.0
10.0
8.0
6.0
PSI