


NYLON, GLASS-FILLED, COUPLERS AND ADAPTERS

FEATURES

- Safety latches available on all couplers and dust caps ranging in size from 1-1/4" to 4"
- Lightweight-1/2 the weight of aluminum
- Strong—resists cross threading, thread seizure and “out-of-round” condition
- Chemical resistant to most acids (Refer to chemical resistance table for specific recommendation)
- Non-conducting
- All couplers feature stainless steel handles & pins, blue nylon handles available
- Interchangeable with other couplers and adapters manufactured to MIL-spec
- EPDM gaskets furnished standard. Buna-N, Viton® and Nitrile also available
- Temperature range under normal conditions -30°F to 200°F

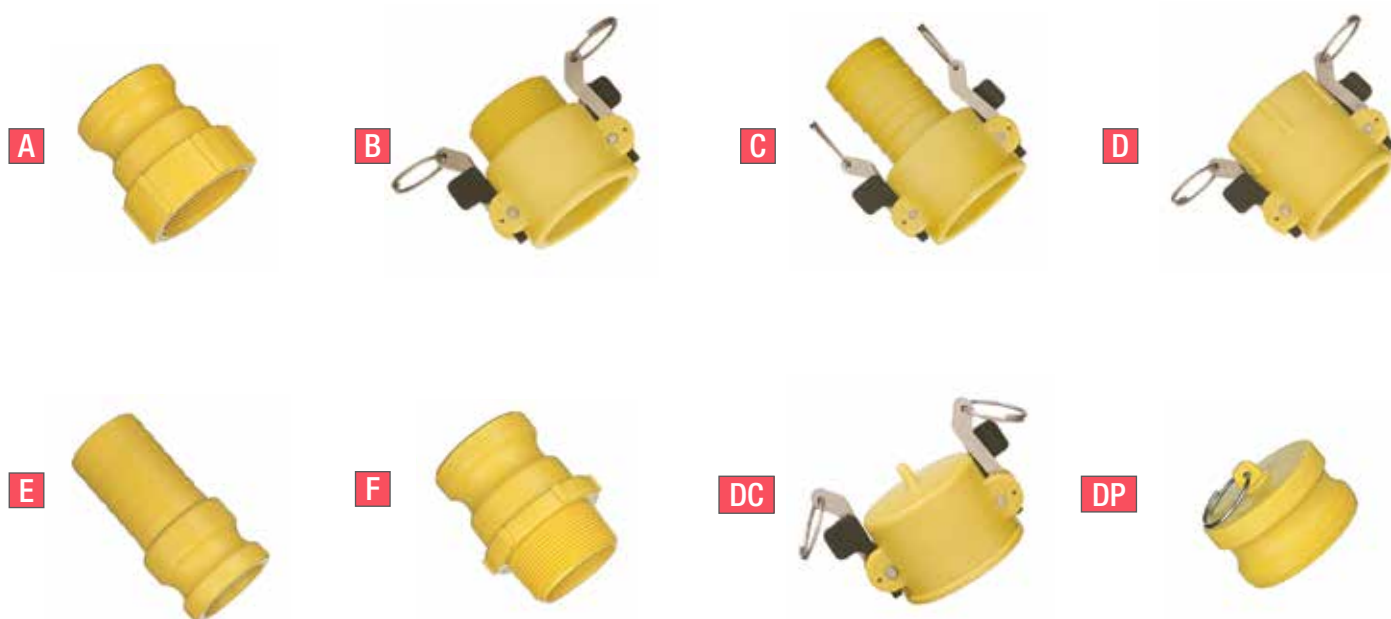

NYLON, GLASS-FILLED, COUPLERS & ADAPTERS

Replacement parts can be found on page 67

ITEM	DESCRIPTION	1/4"	3/8"	1/2"	5/8"	3/4"	1"	1-1/4"	1-1/2"	2"	3"	4"
A	Male Adapter/Female Thread	025 A-N	037 A-N	050 A-N		075 A-N	100 A-N	125 A-N	150 A-N	200 A-N	300 A-N	400 A-N
B	Female Coupler/Male Thread			050 B-N		075 B-N	100 B-N	125 B-N	150 B-N	200 B-N	300 B-N	400 B-N
C	Female Coupler/Hose Shank*			050 C-N	062 C-N	075 C-N	100 C-N	125 C-N	150 C-N	200 C-N	300 C-N*	400 C-N**
D	Female Coupler/Female Thread	025 D-N	037 D-N	050 D-N		075 D-N	100 D-N	125 D-N	150 D-N	200 D-N	300 D-N	400 D-N
E	Male Adapter/Hose Shank			050 E-N	062 E-N	075 E-N	100 E-N	125 E-N	150 E-N	200 E-N	300 E-N	400 E-N
F	Male Adapter/Male Thread			050 F-N		075 F-N	100 F-N	125 F-N	150 F-N	200 F-N	300 F-N	400 F-N
DC	Female Coupler Cap					075 DC-N	100 DC-N		150 DC-N	200 DC-N	300 DC-N	400 DC-N
DP	Male Adapter Plug					075 DP-N	100 DP-N		150 DP-N	200 DP-N	300 DP-N	400 DP-N

* 3" x 2-1/2" - 300250C-N
 ** 4" x 3" - 430C-N

* Coupler/adapters in this group utilize a 3/4" coupler/adapter connection while maintaining the indicated hose connection size.

** Coupler/adapters in this group utilize a 1-1/2" coupler/adapter connection while maintaining the indicated hose connection size.

Size
 1/4"-1"
 1-1/4"-2"
 3"
 4"

Operating Pressure
 175 psi max @ 70° F
 150 psi max @ 70° F
 100 psi max @ 70° F
 50 psi max @ 70° F

- On 1/4", 3/8", 1/2" & 5/8" sizes the coupler and adapter portion is to 3/4" standard.
- On 1-1/4" size the coupler and adapter is to 1-1/2" standard.
- British thread also available. Contact customer service.

WARNING: To prevent accidental opening fully engage and secure handles prior to pressurizing.